



Contact
VB-TEC
Dhr. Jérôme Rommens

Adres
Brugsesteenweg 81
8740 Pittem
BE0730.762.663

service@vbtec.be

PROJECT: Koppeling & monitoring

Handleiding

KOPPELING & MONITORING


1. NETWERKKOPPELING

1.1 DE APPLICATIE



Download de eSolar SET applicatie in de Google Play store of de Apple App Store.

1.2 INLOGGEN

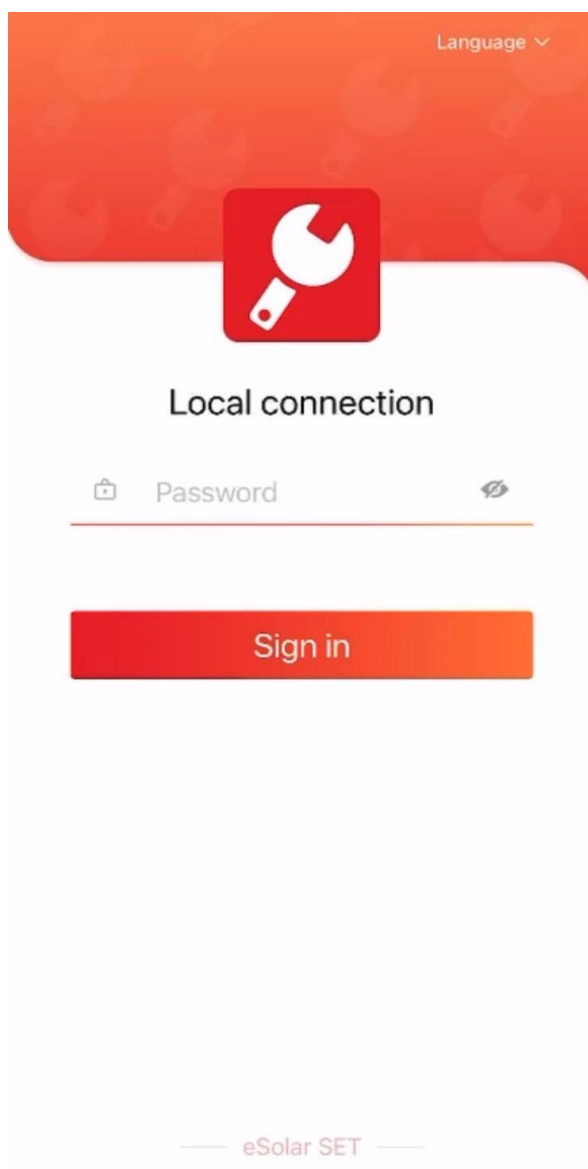

Language ▾



Local connection

 Password 

Sign in

— eSolar SET —

Voer het wachtwoord in: 123456


Vervolgens: Sign in

1.3 KIES UW VERBINDINGSMETHODE




Selecteer: Bluetooth, vervolgens: Next.

1.4 SELECTEER HET CORRECTE TOESTEL

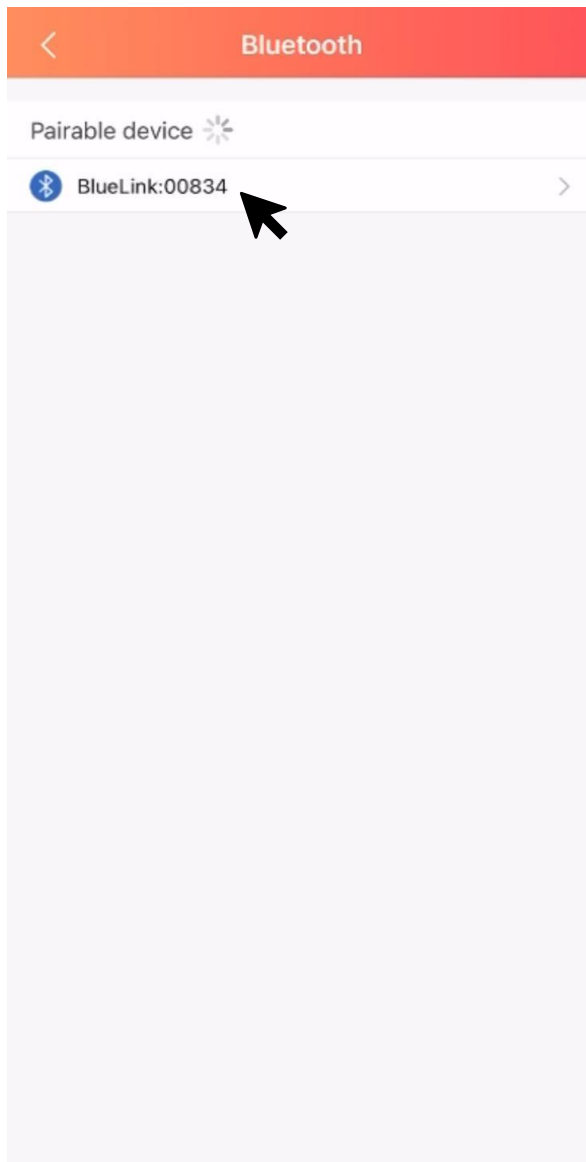

De naam van de SAJ AIO3 module begint altijd met BlueLink, gevolgd door 5 cijfers.

1.5 SELECTEER DE AIO3 MODULE

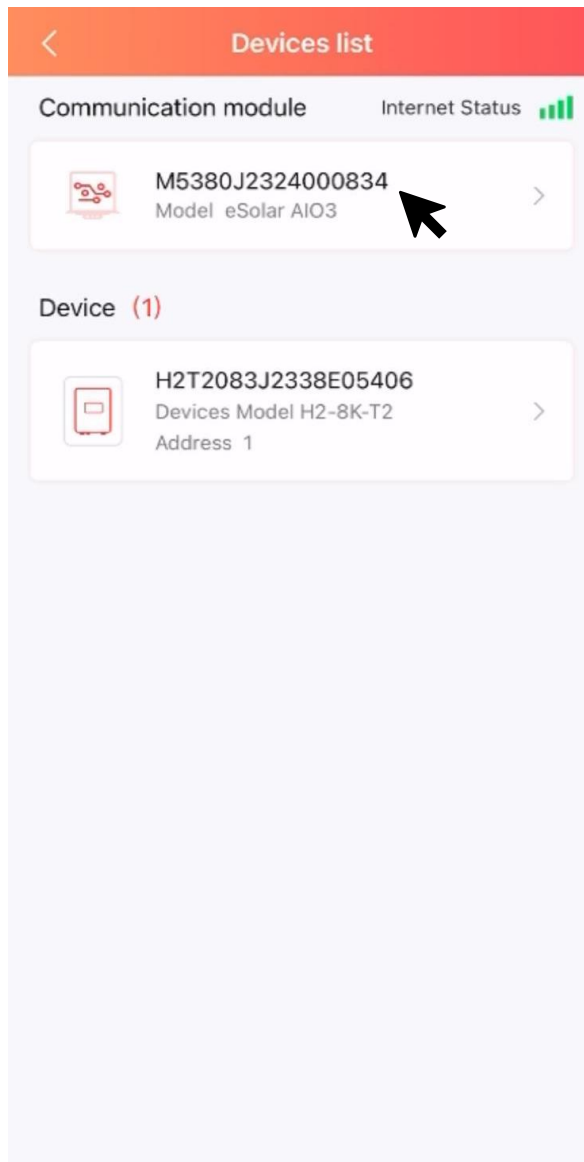

Note: internet status staat wanneer nog niet geconnecteerd in status 'niet verbonden'.

1.6 OPEN DE INSTELLINGEN VAN DE IOA3 MODULE

Communication module

Module SN
M5380J2324000834

Model eSolar AIO3
Product Code 1030002500018300
Firmware Version v1.206
Hardware Version v3.0
Working Mode auto

WIFI

link	up
mac addr	CC:DB:A7:5D:12:E8
IP	192.168.0.165
mask	255.255.255.0
gateway	192.168.0.1
router ssid	Bureau PH
router bssid	D8:47:32:22:7D:08
router signal	-30dBm


Ethernet

link	down
mac addr	CC:DB:A7:5D:12:EB
IP	0.0.0.0
mask	0.0.0.0
gateway	0.0.0.0

Note: hier staat wanneer nog niet geconnecteerd: 'down'

Open de instellingen van de communicatiemodule door op het tandwielje linksboven te klikken.

1.7 OPEN DE WIFI CONFIGURATIE

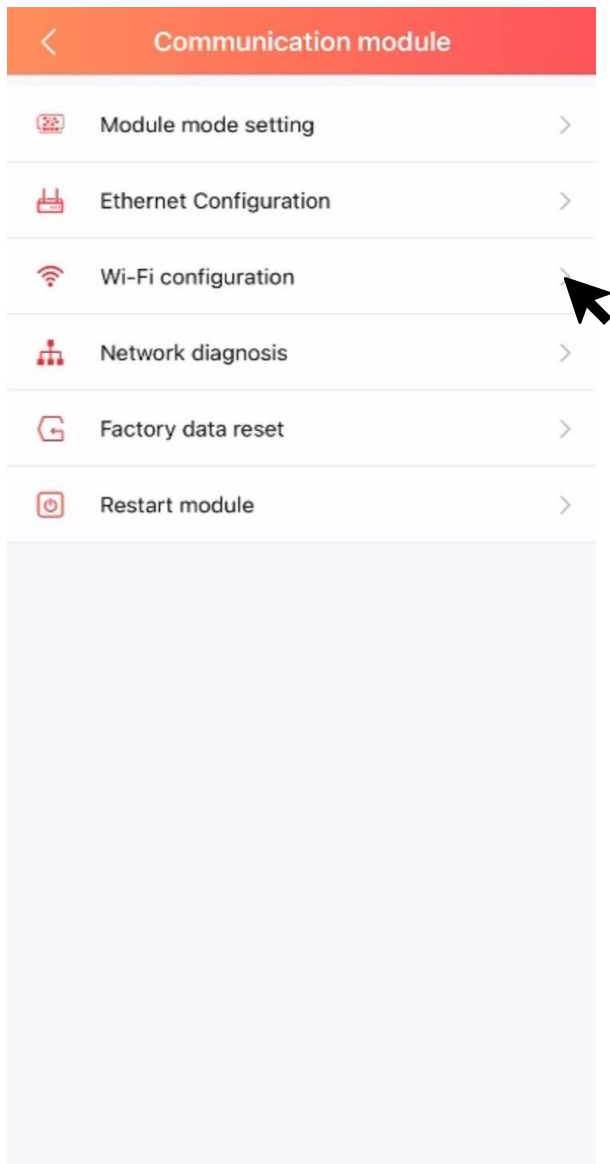

Klik op Wi-Fi configuration.

1.8 SELECTEER HET CORRECTE NETWORK



Selecteer het correcte WIFI-netwerk.

1.9 VOER HET CORRECTE WACHTWOORD IN


The image shows a mobile application interface for Wi-Fi configuration. At the top, there is a red header bar with a back arrow and the text 'Wi-Fi configuration'. Below the header, there is a diagram showing a smartphone on the left and a router on the right, connected by two arrows: the top one is labeled 'SSID' and the bottom one is labeled 'Password'. Below the diagram, there is a text input field for the SSID, which contains the text 'WiFi_SSID' and 'Bureau PH'. To the right of the input field is a dropdown arrow. Below the SSID field, there is a text input field for the router password, which contains the text 'Router password' and 'Please enter the router passw...'. At the bottom of the screen, there are two red buttons: 'Save' and 'IP Configuration'.

Voer het correcte wachtwoord in en druk 'save'.

Na een poos zal de connectie zichtbaar zijn (zie 'notes' punt 1.5/1.6)


2. MONITORING

2.1 APPLICATIE

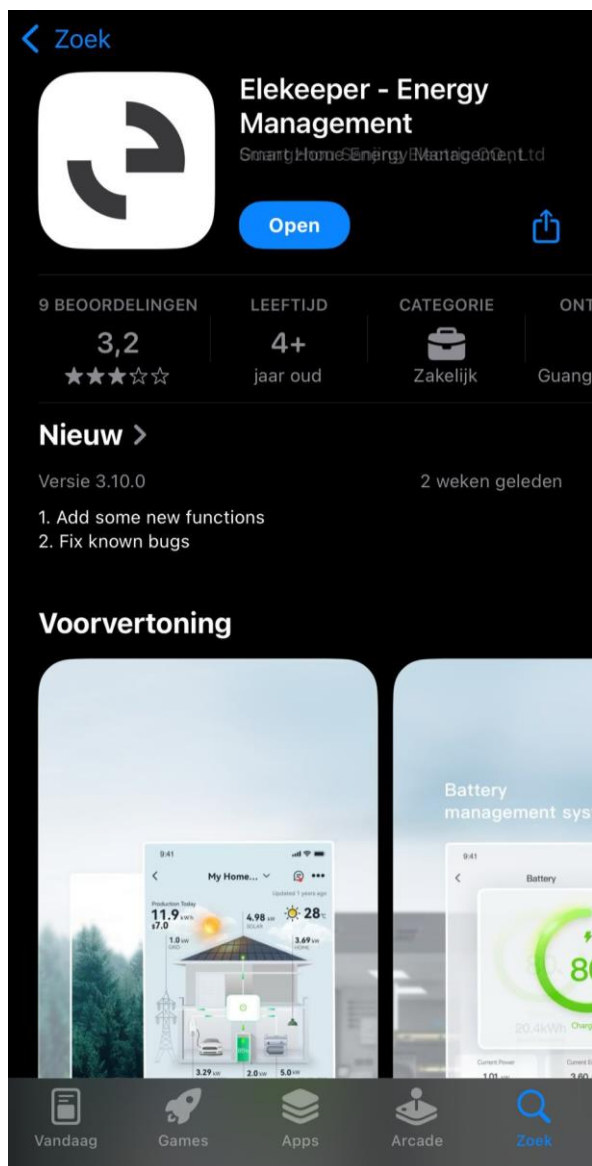

Download de Elekeeper applicatie in de Google Play store of de Apple App Store.

2.2 INLOGGEN

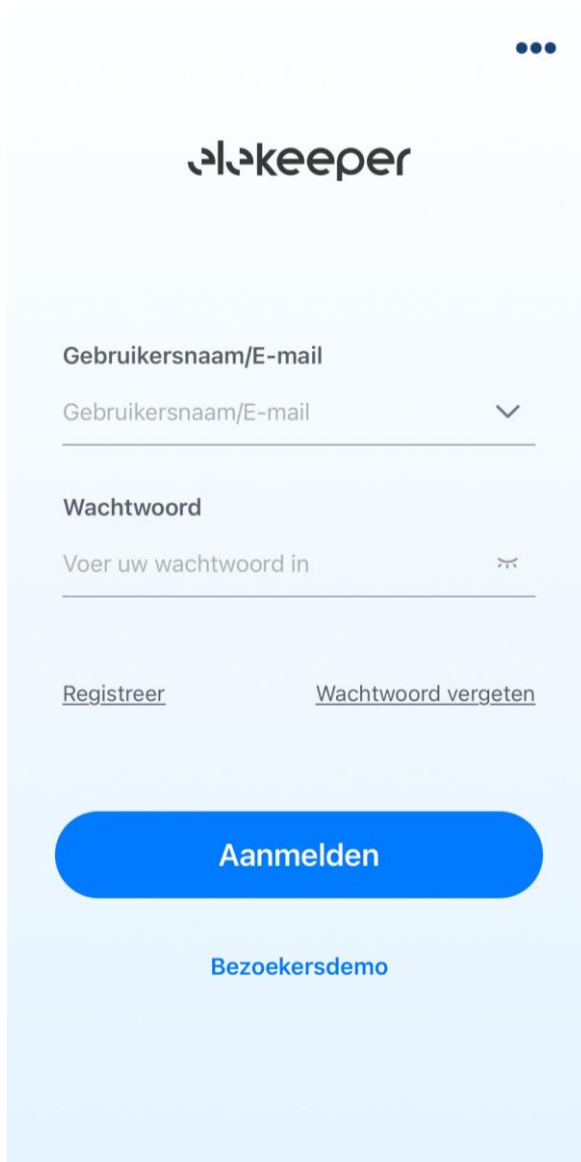

The screenshot shows the login interface for 'elekeeper'. At the top right, there are three blue dots. The 'elekeeper' logo is centered at the top. Below it, there are two input fields. The first is labeled 'Gebruikersnaam/E-mail' and contains the placeholder text 'Gebruikersnaam/E-mail' with a downward arrow icon. The second is labeled 'Wachtwoord' and contains the placeholder text 'Voer uw wachtwoord in' with an eye icon. Below these fields are two links: 'Registreer' and 'Wachtwoord vergeten'. A large blue button labeled 'Aanmelden' is centered below the links. At the bottom, there is a link labeled 'Bezoekersdemo'.

Inloggen met de door VB-TEC voorziene gegevens (mail Elekeeper).